

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61L 2/28, G01N 31/22	A1	(11) International Publication Number: WO 00/61200 (43) International Publication Date: 19 October 2000 (19.10.00)
(21) International Application Number: PCT/US00/09493 (22) International Filing Date: 11 April 2000 (11.04.00) (30) Priority Data: 60/129,130 13 April 1999 (13.04.99) US (71)(72) Applicant and Inventor: PATEL, Gordhanbhai, N. [US/US]; 120 Wood Avenue, Middlesex, NJ 08846 (US). (74) Agent: Behr, Omri, M.; Selitto and Associates, P.O. Box 1477, Edison, NJ 08818-1477 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>With amended claims.</i>
(54) Title: INDICATORS FOR MONITORING STERILIZATION WITH PLASMA (57) Abstract There is provided a device for monitoring sterilization with plasma comprising at least one layer of polymer, having incorporated therein an indicator capable of undergoing at least one color change, an activator for the indicator. Wherein said activator is contacted with said plasma, it undergoes a reaction with it to produce a product which causes the indicator to undergo a color changer. There is further provided a process for making this device and for using it.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

5

TITLE OF THE INVENTION

Indicators for monitoring sterilization with plasma

10

BACKGROUND OF THE INVENTION

1. FIELD OF THE INVENTION

The present invention relates to chemical indicators for monitoring oxidizing vapors or plasmas, in particular for sterilization of medical supplies with plasma and detection of hydrogen peroxide.

15

2. BRIEF DESCRIPTION OF PRIOR ART

A wide variety of medical supplies and biological wastes are sterilized with materials and techniques, such as steam, ethylene oxide (ETO), high energy radiation and plasma. It is essential to assure that these supplies or wastes are actually sterilized. A number of indicators, dosimeters and monitors have been proposed in the literature. They include biological and chemical indicators. The color changing chemical indicators are inexpensive and hence are widely used.

In order to assure the sterilization with plasma has taken place, the indicator must determine integral value of parameters, such as time, temperature, humidity, and concentration of the plasma gas. Biological indicators made from cultures, such as *Bacillus subtilis* spores, *Bacillus pumilus* spores and *Clostridium sporogenes* spores have been used for monitoring the sterilization, for example, US patents 5,801,010, 5,788,925, and 5,866,356. However, chemical indicators are preferred because they are simple and inexpensive.

W09846994A1 and W09846279A1 describe compositions comprising dyes and organic amines which change color when contacted with hydrogen

35

- 5 peroxide plasma. W09852621A1 describes dyes, such as, acid fuschin which change color when contacted with plasma of hydrogen peroxide.

SUMMARY OF THE INVENTION

- There is provided a polymer device for monitoring plasmas as well as
10 the presence of oxidants, comprising:
at least one layer of polymer, having incorporated therein
a) an indicator capable of undergoing at least one color change
b) an activator for said indicator wherein said activator, when contacted
with said plasma or oxidant, introduces a reaction wherein the product of said
15 reaction causes said indicator to undergo said color change.

- The indicators suitable for use in this device include pigments, dyes, precursors of said dyes, and mixtures of any of these. Suitable indicators include pH-sensitive sensitive dyes such as phenol red, m-cresol purple,
20 pararosaniline or mixtures thereof. A desirable quality of the indicator is the ability to undergo halogenation, especially bromination or oxidation. The source of such brominating or oxidizing agents being the reaction between the plasma and the activator. Desirably the indicator undergoes a yellow-to-blue, red-to-yellow or red-to-blue color change.

- 25 The polymer used in the device is, suitably, soluble in water or dispersible in an aqueous medium solvent. A broad class of polymers may be used. They may be homopolymers, copolymers or a mixture thereof, suitably a polymer of styrene, acrylate, acrylic acid, acrylamide, vinyl acetate,
30 vinyl alcohol, vinyl chloride, styrene, polyurethanes, cellulose nitrate, carboxymethyl cellulose or a mixture thereof. Desirably, the polymer is an acrylate polymer, cellulose nitrate or carboxymethylcellulose

- Suitably the reaction product of the activator and the plasma is a halo-
35 acid. Suitable activators are salts such as halides, preferably bromides. Desirable halides include bromides of alkali metals or of quaternary amines

5 such as tetrabutylammonium bromide or tetraethylammonium bromide or a mixture thereof. The activator may also be a salt of an amine and an organic or inorganic acid. It may also be a metal thiocyanate such as sodium thiocyanate .

10 The device may additionally comprise an additive to control the diffusion of plasma gases, such a crosslinking agent or a plasticizer. These may include zinc compounds or polyaziridines

15 The device may have two layers, that is to say additionally comprising a polymeric top layer. This may be a wedge shaped polymeric top layer.

20 The process of making a device of the present invention comprises dissolving the components thereof in a solvent thereof, applying the thus formed solution to a substrate and permitting the solvent to evaporate.

25 The substrate may be a container for an item to be sterilized. It may also be a plastic film, paper or metal, including but not limited polyester film or spun bonded polyolefins.

30 In a desirable embodiment of the invention the solution is an ink formulation suitably an aqueous ink formulation most suitably one which comprises an acrylate polymer.

35 A process of using a device of the present invention for monitoring sterilization of materials comprises the steps of affixing the device to said materials or containers containing same, carrying out the process of sterilization including the step of introducing the plasma into a vessel containing said materials or containers thereof and observing the presence of a color change of said device.

5 Among the plasmas which may be utilized in this process are those derived from hydrogen peroxide, perchloric acid and oxygen, most suitably from hydrogen peroxide.

10 DETAILED DESCRIPTION OF THE DRAWINGS

 Figure 1. A side schematic cross section of one embodiment of the plasma sterilization indicator of the invention where an indicator layer comprised of a polymeric binder, plasma activator and plasma indicator is applied on a substrate.

15 Figure 2. A side schematic cross section of the plasma sterilization indicator of the invention having an adhesive layer and a release layer.

 Figure 3. A side cross section of a two layered plasma sterilization indicator
20 layer.

 Figure 4. A side schematic cross section of the moving boundary plasma sterilization indicator created by coating a wedge shaped barrier on the plasma indicator.

25 These devices can also be used for detecting and monitoring oxidants, suitably in gaseous form, such as hydrogen peroxide ozone, and the like.

30 DESCRIPTION OF THE PREFERRED EMBODIMENTS

 The device can be best described by reference to the Figures. As shown in Figure 1, the device in its simplest form is comprised of an indicator layer 20, applied on a substrate 10. The substrate 10 can also be a container, such as pouch for products to be sterilized. The indicator layer 20 is
35 compos d of a polymer 50 containing at l east one indicator 30 capable of undergoing a color change when reacted with a reactive species produced by

5 exposure of the activator 40 to plasma. The layer 20 may additionally contain other additives 80 to control the rate of the color change, such as a crosslinking agents or plasticizers to control diffusion of plasma gases either to increase or decrease the penetration of plasma.

10 As shown in Figure 2, the substrate 10 of the device can further comprise an adhesive layer 60. The adhesive layer allows the device to be affixed to a container of product to be sterilized. To the bottom of the adhesive layer 60, can further be affixed a release layer 70 for ease in packaging and for removal just prior to use.

15 As shown in Figure 3, a simple form of a multi-layer device can have two indicator layers 20 and 200. The multi-layer device can thus undergo more than one color change. The device can be created by applying another indicator layer 200 over the first indicator layer 20. The indicator 300 of the indicator layer 200 would be different from indicator 30 of the indicator layer 20. The polymers 50 and 500, additives 80 and 800 and the activators 40 and 400 of the first indicator layer 20 and the second indicator layer 200 could be the same or different. When exposed to plasma, the top indicator layer 200 may undergo a color change (e.g., red-to-colorless) first followed by the color
20 change of the bottom indicator layer 20 (e.g., colorless-to-blue). Thus the device would undergo two color changes. There are many variations of the multi-layer device. For example, the device can have more than two indicator
25 layers and can have one or more barrier layers between or on them.

30 A simple form of a moving boundary indicator device is shown in Figure 4. The moving boundary device can be created by applying a wedge shaped barrier layer 2000 over the indicator layer 20. The barrier layer will resist but will be permeable to plasma and its components. There are many variations to this moving boundary device. For example, the wedge barrier
35 coat may contain indicator and both the indicator and the barrier layers be in form of wedge but in opposite direction.

5

Other variations of the plasma indicator device are also possible, for example, a gradient device can be created by coating a series of formulations having the time required for the color change either increase or decrease. Such gradient can be obtained by coating such formulations in form of lines or bars next to each other.

The device may also include a printed number, an image, a bar code or a message, e.g., "if this print is green, the product inside is sterilized".

15

Activators produce other reactive species, such as those from compounds having: -I, -Br, -Cl, -NH-, -NH₂, -OH, =O, -NO, -NO₂, -NO₃, -SO₃, -SO₃H, -COOH, -PO₄, SCN, etc. Especially desirable are bromides, i.e., from tetraethyl ammonium bromide (TEAB), add Br as an oxochrome to the dyes. Similarly other activators add other oxochromes to the dye.

20

Results from a series of experiments indicate the product formed by the reaction of phenol red and the bromide salts is most likely bromophenol blue. We have also found that nature, e.g., pH, of the medium i.e., binder, plays an important role in determination of color of the reaction product, especially the dye produced is a pH-sensitive dye. For example, when exposed to hydrogen peroxide, phenol red changes from yellow-to-orange red in polyvinyl alcohol while it changes from yellow-to-blue in EC001270 (an acrylate printing ink extender supplied by Environmental Inks and Coating Co., Lithicum, MD). The pH of EC001270 coating is about 4-5 while that of polyvinyl alcohol is about 7. Bromophenol blue appears red in polyvinyl alcohol while blue in EC001270.

The color change in EC001270 and TEAB system for chlorophenol red is yellow-to-purple, m-cresol purple is yellow-to-blue, cresol red is yellow-to-purple, ph nol red is yellow-to-blue, and thymol blue is yellow-to-blue upon exposure to hydrogen peroxide vapor and its plasma. Evaluation of thes and

35

- 5 other dyes which develop colors indicates that brominated dyes are formed for some of these dyes upon exposure to hydrogen peroxide and its plasma.

As shown in Table 1 below , the conclusion that EC001270, TEAB and dyes which develop color is supported by the pH range and colors of the
10 substrate dyes (dyes before the treatment) and corresponding brominated dyes (after exposing to hydrogen peroxide and its plasma).

Table 1. Color of the starting substrate dyes and corresponding brominated dyes at low and high pH ranges.

	Substrate dye	Low		High		Brominated dye	Low		High	
		pH	Color	pH	Color		pH	color	pH	Color
5	Chlorophenol red	4.8	Yellow	6.4	Red	Bromochlorophenol red	3.2	yellow	4.8	Purple
	m-Cresol purple	7.4	Yellow	9.0	Purple	Bromocresol green	3.8	yellow	5.4	Blue-green
	Cresol red	7.2	Yellow	8.8	Purple	Bromocresol purple	5.2	yellow	6.8	Purple
	Phenol red	6.8	Yellow	8.2	Red	Bromophenol blue	3.0	yellow	4.6	Blue
10	Thymol blue	8.0	Yellow	9.2	Blue	Bromothymol blue	6.0	yellow	7.6	Blue
	Xylenol blue	8.0	Yellow	9.6	Blue	Bromoxyleneol blue	6.0	yellow	7.6	Blue

5 **Indicators:** Any material which undergoes a color change in presence of a plasma activator can be used a plasma indicator. Plasma indicators are also referred herein to as indicators. Most preferred classes of plasma indicators are dyes, pigments and their precursors. A large number of dyes and dye precursors, e.g., are listed in Table 2.

10

Table 2. List of useable dyes.

These have been tested with tetrabutylammonium bromide as an activator in polyacrylate (EC001270) and in the presence of solvent based cellulose nitrate.

15

Acid alizarin violet N, acid black 24, acid black 48, acid blue 113, acid blue 120, acid blue 129, acid blue 161, acid blue 25, acid blue 29, acid blue 40, acid blue 41, acid blue 45, acid blue 80, acid blue 93, acid fuschin, acid green 25, acid green 27, acid green 41, acid orange 74, acid red 1, acid red 114, acid red 151, acid red 88, acid violet 17, acid violet 7, acid yellow 99, acridine orange, acridine orange base, acridine orange G, acridine yellow G, acriflavine hydrochloride, alcian blue 8GX, alcian yellow, alizarin, alizarin blue black SN, alizarin complexone, alizarin complexone dihydrate, alizarin red, alizarin violet 3R, alizarin yellow GG, alizarin yellow R, alkali blue 6B, alkali fast green 10GA, alphazurine A, aluminon, aminoacridine hydrochloride, aminoanthraquinone, aminophthalhydrazide, aniline blue, astra blue 6GLL, auramine O, azocarmine, azocarmine B, azure A, azure B, azure B thiocyanate, azure C, basic blue 3, basic blue 41, basic blue 66, basic fuchsin, basic red 29, basic yellow 11, benzo purpurin 4B, biebrich scarlet NA salt, bismarck brown B, bismarck brown Y, blue tetrazolium, bordeaux R, brilliant blue B, brilliant blue G, brilliant cresyl blue ALD, brilliant crocein MOO, brilliant green, brilliant sulphaflavine, brilliant yellow, bromochlorophenol blue, bromocresol green, bromocresol purple, bromophenol blue, bromopyrogallol red, bromothymol blue, bromoxylanol blue, calmagite, carbol fuchsin, carminic acid, carotene, celestine blue, Chicago sky blue, chlorophenol red, chrome azurol S, chromotrope 2B, chromotrope 2R, chromoxane cyanine B,

35

- 5 chrysoidin, chrysoph nine, cibacron brilliant red 3BA, Congo red, copper(II) phthalocyanine, cresol purple, cresol red, cresol, cresolphthalein, cresolphthalein complexone, crystal violet, curcumin, darrow red, diaminoacridine hemisulfate, diazo red RC, dibromofluorescein, dichlorofluorescein, dichloroindophenol, dicinnamalactone,
- 10 diethylaminomethyl coumarin, diethyloxacarbocyanine iodide, diethylthiatricarbocyanine iodide, dihydroxy benzenesulfonic acid, dilithium phthalocyanine, dimethyl methylene blue, dimethylglyoxime, dimethylindoaniline, dinitro diphenylamine, diphenylthiocarbazone, direct blue 71, direct green 6, direct red 23, direct red 75, direct red 81, direct violet 51,
- 15 direct yellow 62, disodium phthalocyanine, disperse blue 14, disperse blue 14, disperse blue 3, disperse orange, disperse orange 11, disperse orange 25, disperse yellow 7, emodin, eosin B, eosin Y, eriochrome black T, eriochrome blue black B, erioglaucine, erythrosin B, ethyl eosin, ethyl orange, ethyl red, ethyl violet, Evans blue, fast black, fast blue B salt, fast blue BB,
- 20 fast blue RR, fast blue RR salt, fast corinth V salt, fast garnet GBC base, fast green FCF, fast red aluminum salt, fast red violet LB salt, fast violet B salt, fat brown RR fat green GDC salt, flavazin I, fluorescein, fluorexon, gallocyanine, guinea green B, hematoxylin, hydroxy naphthol blue, 1,4-hydroxy-naphthoquinone, indigo, indigo carmine, indoline blue, iron(II) phthalocyanine,
- 25 janus green B, lacmoid, leishman stain, leuco crystal violet, leucomalachite green, leucoquinizarin, light green SF yellowish, lissamine green B, litmus, luxol fast blue, malachite green base, malachite green hydrochloride, malachite green oxalate, metanill yellow, methyl eosin, methyl green, methyl orange, methyl red, methyl violet 2B, methyl violet B base, methyl yellow,
- 30 methylene blue, methylene green, methylene violet 3RAX, methylesculetin, methylthymol blue, mordant blue 9, mordant brown 24, mordant brown 4, mordant orange, mordant orange 1, mordant orange 6, mordant red 19, mordant yellow 10, morin hydrate, murexide, naphthochrome green, naphthol AS, naphthol blue black, naphthol green B, naphthol yellow,
- 35 naphtholbenzein, naphtholbenzene, naphtholphthalein, neutral red, new coccine, new fuchsin, new methylene blue N, nigrosin, Nile blue

5 chloride, nitrazine yellow, nitro red, nitro-phenanthroline, nitrophenol-2, nitrophenol-3, nitrophenol-4, nitrophenylazo-resorcinol, nuclear fast red, oil blue N, oil red EGN, oil red O, orange G, orange II, palatine chrome black 6BN, palatine fast yellow BLN, pararosaniline acetate, pararosaniline base, pararosaniline chloride, patent blue VF, pentamethoxytriphenylmethanol,
10 phenanthroline, phenazine, phenol red, phenolphthalein, phenolphthalein diphosphate, phenothiazine, phenylazoaniline, phenylazodiphenylamine, phenylazoformic acid, phenylazophenol, phloxine B, phthalocynine, pinacyanol chloride, plasmocorinth, ponceau S, primuline, procion red MX-5B, procion yellow H-E3G, prussian blue, purpurin, pyridlazo naphthol,
15 pyridylazoresorcinol sodium salt, pyrocatechol violet, pyrogallol red, pyronin B, quinaldine red, quinizarin, quinoline yellow, reactive black 5, reactive blue 15, reactive blue 2, reactive blue 4, reactive orange 16, resazurin, resorcin crystal violet, rhodamine B, rhodamine B base, rhodamine GG, rhodamine S, rhodanine, rosalic acid, rose bengal, rose bengal lactone, safranin O,
20 solvent blue 35, solvent blue 59, solvent green 3, styryl 7, sudan black B, sudan orange G, sudan red 7B, sulfobromophthalein sodium salt, sulforhodamine B, tartrazine, tetrabromophenol blue, tetrabromo phenolphthalein, tetrabromo phenolphthalein, tetraiodo phenolphthalein, tetraphenyl-butadiene, tetrazolium violet, thiazol yellow G, thioflavin S,
25 thioflavin T, thionin, thymol blue, thymolphthalein, thymolphthalein monophosphate, thymolphthalein monophosphate, toluidine blue O, triphenylmethyl bromide, tropaeolin O, trypan blue, turmeric, vanillin azine, variamine blue RT salt, variamine blue RT salt, victoria blue B, victoria blue B, victoria pure blue BO, wright stain, xilidine ponceau 2R,, xylenol blue, and
30 xylenol orange.

Some dyes, e.g., malachite green, reduced with ascorbic acid, sodium sulfite and formaldehyde were also used. Some of these dyes are fluorescence dyes and they either lost their fluorescence or there was a
35 change in fluorescence.

5 **Simultaneous reactions**: We have also observed that certain dyes, e.g., phenol red show development of color (due to formation of bromophenol blue) followed by de-coloration upon prolonged exposure to hydrogen peroxide or plasma treatment.

10 **Activators**: Any chemical which produces reactive species with a plasma or hydrogen peroxide which, when reacted with a indicator compound, degrade, cleave or add to the molecule or react to form a colored compound can be used as an indicator activator. Similarly, a chemical which
15 when reacted with plasma or hydrogen peroxide and produces a chemical which changes environment, e.g., pH of the medium, can also be used as an indicator activator. Production of an acid or base introduces a change of a pH-sensitive dye. A variety of classes of organic and inorganic compounds may be used as activators for monitoring hydrogen peroxide and its plasma. They include alcohols, amides, amines, bisulfites, bisulfates, carbonates,
20 carbamates, chelates, metal complexes, cyanates, esters, halides, halocarbons, ketones, nitrites, nitrates, nitriles, nitro, nitroso, oximes, phenols, phosphates, sulfates, sulfides, sulfites, thiocyanates, ureas, urethanes, salts, oxidants and reducing agents. Organic and inorganic salts, especially halides were very effective activators. The specific examples of compounds explored
25 as plasma activators with some selected dyes (e.g., chrome azurole S, methyl green, acid fuschin, direct blue 71 and nile blue) are listed in Table 3.

Table 3. List of specific examples of activators.

30 Abietic acid, acetone oxime, aluminum acetylacetonate, aluminum ammonium sulfate, aluminum chloride, aluminum sulfate, amino deoxy d-sorbitol, ammonium acetate, ammonium bisulfite, ammonium bromide, ammonium carbamate, ammonium nitrate, ammonium sulfamate, ammonium
35 sulfite, ammonium thiocyanate, ammonium thiosulfate, ascorbic acid, azodicarbonamide, azodicarbonamide, benzilic acid, benzoic acid,

5 benzophenone, benzophenone tetracarboxylic acid,
 benzophenonetetracarboxylic diahydride, benzoquinone dioxime,
 benzoquinone dioxime, benzyloxy)phenol, butyl phenol, caffeine, calcium
 ferrocyanide, catechol, catechol, chloranilic acid, copper thiocyanate,
 cupferron, cupferron, cyclopanatanone oxime, dehydroacetic acid, di-butyl-t-
 10 4-methylphenol, dihydroxy acetophenone, dihydroxy dimethoxy
 benzophenone, dihydroxy naphthalein disulfonic acid,
 dihydroxyacetophenone, dihydroxy-dimethoxybenzophenone, dimethyl
 fumarate, dimethyl tartrate, diphenyl butyro lactone, diphenylglyoxime,
 diphenylthiocarbazon, di-t-butyl-4-methylphenol, dithizone or
 15 diphenylthiocarbazon, ethylcarbonate, ethylenediamine tetraacetic acid and
 its salts, ferroin, fumaric acid, gallic acid, gluconic acid Fe(II) salt, glucose
 penta acetate, glucose penta acetate, glucose pentaacetate, glutaric acid,
 glycerophosphate, glyconolactone, hexahydro norbornene dicarboxylic acid,
 hydroquinone, hydroxy acetophenone, hydroxy acetophenone, hydroxy
 20 cinnamic acid, hydroxy methoxybenzophenone, hydroxy octyloxy
 benzophenone, hydroxybenzophenone, hydroxybenzophenone,
 hydroxymethoxybenzophenone, hydroxyquinoline, hydroxyquinoline, inositol,
 iron acetylacetonate, iron complexes such as potassium ferrocyanide, iron
 sulfate, isoascorbic acid, levulinic acid, maleic acid, maleic acid, malic acid,
 25 mandelic acid, mercaptobenzothiazole, methyl dinitrosalicylate,
 methyl dinitrosalicylate, methylesculetin, methyl trihydroxybenzoate, naphthol,
 naphthol-disulfonic acid, naphthoquinone tetrasulfate sodium salt, nitron,
 nitron, nitroso-1,2-naphthol, nitrosophenol, oxalic acid, phenanthroline,
 phenanthroline, phthalide, propylgallate, propylgallate, pyridine aldol,
 30 pyruvic acid, resorcinol, rutin hydrate, salicylaldehyde, salicylaldehyde,
 salicylanilide, salicylanilide, salicylic acid, sodium acetylacetonate, sodium
 bisulfite, sodium cyanide, sodium diethyldithiocarbamate, sodium
 diethyldithiocarbamate, sodium dithionite, sodium hydrosulfide, sodium nitrite,
 sodium persulfate, sodium sulfite, sodium sulfite, sodium sulfite, sodium
 35 sulfite, sodium thiocyanate, sodium thiocyanate, sodium thiosulfate,
 sulfosalicylic acid 5, tannic acid, tetrabutylphosphonium bromide,

- 5 ammonium hydroxide, additives, such as wax and alcohol and the balance water, has been found very suitable.

The nature of the polymer, e.g., pH and permeability to the gases, plays an important role. Color change of phenol red and TEAB system with
10 hydrogen peroxide vapor is faster in EC001270 (an acrylate) and slower in Witcobond 213, (a polyurethane of Witco Corporation, Houston, TX). Permeability of the reactive gases can also be controlled by addition of a crosslinking agent and other additives such as plasticizers which change the rate of diffusion. When exposed to hydrogen peroxide vapor, the color
15 change of phenol red with potassium iodide in EC001270 is blue while it is red in polyvinyl alcohol. The pH of the coating of EC001270 is about 4-5 while that of polyvinyl alcohol is about 7.

Though aqueous ink or coating formulations are preferred, one can
20 use solvent based coating formulations polymers used in such formulations are cellulose nitrate, carboxymethyl cellulose, polyolefins, polyvinylchloride, polyurethane, polysilicones and polyepoxy.

Effect of nature of the polymer. Coatings prepared from phenol blue
25 as indicator, TEAB as activator and a variety of polymeric materials as binders were exposed to hydrogen peroxide vapor. EC001270 extender was the fastest binder, Witco 160 (a polyurethane of Witco Corporation) and Rovace 571 (a polyvinylacetate latex by Rohm and Haas) were medium and Airflex TL40 (a polyvinylacetate latex by Air Products) was the slowest. They
30 showed the intermediate color, purple before turning blue.

If the barrier coat is of varied thickness, a moving boundary device can be created. Such device was created by applying a wedge shaped coating with a wedge shaped coating bar of EC001270 on the coating of EC001270,
35 phenol red and TEAB. A boundary was created between the original yellow color and the new blue color after about 2 hours when exposed to hydrogen

5 peroxide. The boundary moved from the thin end towards the thick end with prolonged exposure.

Two-layer device: The device may have more than one indicator layer, each containing indicator, activator and polymer. In order to get at
10 least more than one color change the indicator should be different in different indicator layers and should undergo different color changes.

Both layers do not have to undergo color changes with plasma. Even if one layer undergoes a color change, a color change can be noticed,
15 especially if the top layer becomes colorless

Mixtures: Desired colors, color changes and time required for the color changes can be obtained by mixing proper indicators, activators, additives and polymer in appropriate amounts.

20

Multi color changes: We have found that by mixing more than one dye, each undergoing different color changes, one can obtain more than one color changes. Similarly, one can use a mixture of pigments or dyes which are not affected by plasma and indicators, especially those which become
25 colorless or lighter color with plasma, to get more than one color change. The rate of reaction was also varied by using a mixture of more than one activators of different reactivities.

Substrate: Though the device may be self-supporting polymer film
30 containing the activator and indicator, it is desirable to prepare the device on substrate. The device can be made by coating the indicating formulation on a substrate. The substrate could be any solid surface; for example one made from paper, plastic, ceramic or metal. The substrate could be a container, e.g., bag or pouch, for items to be sterilized. The sterilization indicator can
35 also be prepared in form of stickers, tapes and strips.

5 Although any solid substrate having a smooth surface can be used, a preferred substrate is a flexible and transparent plastic film, natural (cellulose) or synthetic (e.g., spun bonded polyolefins, e.g., Tyvek^R) papers. Plastic films, such as polyethylene, polypropylene, polyvinylchloride, polymethylmethacrylate, polyurethanes, nylons, polyesters, polycarbonates, 10 polyvinylacetate, cellophane and esters of cellulose can be used as the transparent substrate. Metal foils, such as aluminum can be used. The most preferred substrates are the 5 - 300 microns thick films of polyethylene terephthalate and Tyvek^R.

15 UV absorber: If a plasma indicator formulation is sensitive to ultraviolet light, UV absorbing materials can be added to minimize the effect. A large number of UV absorbers are available commercially, e.g., those used in sun-tan lotions, e.g., Tinuvin of Ciba-Geigy Corporation. UV absorbers include compounds such as maleic acid, sodium salicylate, benzophenone, or 20 benzophenone tetracarboxylate and a large number of polyaromatic compounds.

Temperature: The indicator can undergo a color change in a substantial temperature range, namely from a very low temperature (e.g., - 25 30°C) to a very high temperature of a few hundred degrees centigrade. The preferred temperature is below about 60°C, most preferred temperature is ambient.

Time: The time required for color change depends upon the nature of 30 the plasma. A more reactive and more diffusive plasma would change color faster. The time required for the color change can be varied by controlling the diffusion of the components of the plasma by adding proper additives in the polymer. Crosslinking the polymer will reduce the diffusion of the plasma and increase the time required for the color change. Additives which react with 35 plasma can also increase the time required for the color change. Similarly, certain additives, such as oxidant and plasticizer would decrease the time

- 5 required for the color change. The time required for the color change can also be varied by selecting proper indicators, activators, polymers and their mixtures.

For a given sterilization cycle, the time required for the color change
10 can be varied by varying one or more of the following parameters:
w/w = weight to weight percent

1. **Thickness of the polymer indicator layer.**

The thickness of the indicator and barrier layers may vary from a
15 micron to a few hundred microns. The preferred thickness is 1-50 microns and the most preferred range is 2-20 microns.

2. **Concentration of the activator .**

The concentration of activator may vary from 0.1 to 50 w/w%. The
20 preferred concentration is 1 to 20 w/w% and the most preferred concentration is 2-10 w/w/%.

3. **Concentration of the indicator.**

The concentration of the indicator may vary from 0.1 to 20w/w%. The
25 preferred concentration is 10 to 10w/w% and the most preferred concentration is 2-5 w/w%.

4. **Concentration of other additives.**

The concentration of additives may vary from 0.1 to 20w/w%. The
30 preferred concentration is 0.5 to 10w/w% and the most preferred concentration is 1-5w/w/%.

5. **Nature of the polymer**

35 6. **Nature of the barrier**

This is the same group as the polymer, but may be different from it

5

7. Thickness of the barrier

The barrier may be between 2 and 200 microns thick, preferably 2-20 microns.

10 **8. Nature of the activator****9. Nature of the indicator****10. Nature of the additives**

15

he preferred time range for sterilization is from 5 minutes to a few hours, The most preferred time is about 15-60 minutes.

In addition to the plasma of hydrogen peroxide, the device may be
20 used with other plasmas, such as that of peracetic acid and a mixture of hydrogen, oxygen and argon, as well as for hydrogen peroxide itself.

Advantages: The plasma indicator disclosed here offers the following advantages:

- 25 * It is selective to plasma (i.e., no or least effect of other sterilants).
- * It provides desired color changes (from a starting light color, such as white/colorless, yellow, orange, pink, or red to a final dark color, such as blue, green, black, purple or violet).
- * It provides an intermediate color for monitoring a partial cycle.
- 30 * The time, temperature etc required for the color change can be varied by simple means.
- * There is essentially no effect of ambient conditions (e.g., dry heat, humidity and light) before and after the sterilization.
- * It is unaffected by s aling hot bar.
- 35 * It has required pot life.
- * There is no bleeding/diffusion of dyes.

- 5 *. The ingredients (indicators/dyes and activators/additives) are water soluble.
No grinding of ingredients required.
- *. Formulations can be made by simple procedures (mixing/dissolution).
- *. Ink is printable with gravure and flexo presses on polyester, paper and Tyvek.
- 10 *. The print rolls are easy to clean.
- *. It uses least toxic or hazardous chemicals.
- *. It uses readily available chemicals (dyes, activators and binders).
- *. There is an option of precision measurement with moving boundary.
- *. Formulations are inexpensive.
- 15 *. It is unaffected by ethylene oxide, steam, heat and radiation.

5

EXAMPLES

Example 1. General procedure for preparation of the sample devices.

10 In a 10ml test tube were added 3 ml of EC001270 (an acrylate ink extender supplied by Environmental Inks and Coating, Co, Lithicum, MD), about 0.5 ml of solution (60 w/w% TEAB in water) and 0.5 ml of a solution (e.g., 4 w/w% solution of a phenol red in ethanol). The contents were mixed and coated with a #10 wire wound rod on a 100 micron polyester film, paper
15 and Tyvek^R. The coatings were dried in an oven at about 50°C for 5 minutes.

Example 2. Exposure to vapor of hydrogen peroxide.

Samples of example 1 were hung on the side of a 20-liter clear glass
20 battery jar containing an empty petri dish. About 50 ml of 30% hydrogen peroxide was poured in the petri dish and the jar was tightly closed. The color changes of the samples were noted. For testing under low pressure a vacuum desiccator was used instead of the battery jar.

25

Example 3: Effect of activator on dyes.

Using the general procedure described in example 1, coatings were prepared from EC001270 as a polymer, TEAB as an activator, and several of the dyes listed in Table 2 as indicators. The coatings were exposed to one
30 sterilization cycle of hydrogen peroxide plasma using STERRAD[®] model 100, sterilization system made by Advanced Sterilization Products (address). Most of these dyes changed their colors. Some of them either became lighter or colorless while the others developed colors. Only a small number of the dyes showed color change without the activator. Representative color changes are
35 listed Table 4.

5 **Table 4. Representative color changes of some dyes with ECOO1270 and TEAB**

	<u>Dye</u>	<u>Original color</u>	<u>Color after plasma treatment</u>
10	Acid blue 93	Blue	Light blue
	Evans blue	Blue	Colorless
	Thionin	Blue	Red
	Disperse blue 3	Blue	Light red
	Malachite green oxalate	Green	Colorless
15	Disperse red 14	Purple	Yellow
	Acid fuchsin	Red	Colorless
	Pararosaniline acetate	Pink	Colorless
	Dichlorofluorescein	Light pink	Red
	Brilliant yellow	Yellow	Red
20	m-Cresol purple	Yellow	Purple
	Phenol red	Yellow	Blue
	Cresol red	Yellow	Green
	Fluorexon	Yellow	Red
	Basic yellow 11	Yellow	Colorless
25	Fluorescein	Colorless	Red

Similar color changes were obtained with many other activators, such as sodium nitrite, sodium thiocyanate, salts of amines and acids and other binders such as polyurethane (Witcobond 213, Witco Corporation, Houston, TX) and cellulose nitrate.

5

Example 4. Effect of other halides.

Using the procedure described in example 1, coatings were prepared with certain organic and inorganic halides as activators and fluorescein, phenol red, chlorophenol red, acid fuschin, brilliant green and their mixtures as indicators. The coatings were exposed to hydrogen peroxide and its plasma. All coatings of acid fuschin changed from red-to-colorless and that of brilliant green changed from green-to-colorless with plasma. The color changes of the other three dyes are listed in Table 5.

Table 5

Effect of different halides on color changes of some dyes with hydrogen peroxide plasma.

The original color of the coatings was yellow

Dye	Fluorescein	Phenol Red	Chlorophenol Red
Acetylcholine chloride	Pink	L.blue	L.Yellow-green
Ammonium bromide	Pink	Green	L.Yellow-green
Choline chloride	Orange	Colorless	L.Yellow-green
Tetrabutyl ammonium bromide	Pink	Yellow	L.Yellow-green
Choline iodide	Orange	Colorless	L.green
Potassium bromide	Pink	Blue	L.green
Potassium iodide	Yellow	Yellow	Yellow
Sodium iodide	Yellow	Yellow	Yellow
Tetraethylammonium bromide	Pink	Blue	Blue green
Tetrahexylammonium bromide	Yellow	Yellow	Yellow
Tetramethyl ammonium acetate	Orange	Blue	L.blue

L. = light

Mixtures of halides also provided essentially the same color changes. Bromides were more effective than other halides in introducing the color

- 5 change. The iodides show color change when polyvinyl alcohol is used as a binder.

Example 5. Effect of bromides.

- 10 Using the general procedure described in example 1, coatings were prepared using phenol red as an indicator and several organic and inorganic bromides e.g., ammonium bromide, barium bromide, calcium bromide, iron (III) bromide, potassium bromide, zinc bromide, diphenyliodonium bromide, tetrabutylammonium bromide, tetraethylammonium bromide,
15 tetrahexylammonium bromide, dimethyldioctadecylammonium bromide and phenacylpyridinium bromide and mixtures of some bromides as activators. The coatings were exposed to hydrogen peroxide vapor and its plasma.

- All coatings changed from yellow-to-blue. Coatings containing
20 dimethyldioctadecylammonium bromide changed slowly while those of ammonium bromide, potassium bromide and tetraethylammonium bromide changed faster.

Example 6. Effect of pH of the polymer medium.

25

- The pH of the EC001270 coating is about 4-5 while that of polyvinyl alcohol (PVOH) is about 7. Coatings were prepared using potassium iodide and TEAB as activators and brilliant yellow, m-cresol purple, cresol red and phenol red as indicators in EC001270 and polyvinylalcohol as binders. The
30 coatings were exposed to hydrogen peroxide vapor. The coatings of KI/PVOH changed colors in seconds. The results indicate that the device can be used for monitoring hydrogen peroxide. As shown in Table 6, depending upon the pH of the binders, different color can be obtained.

5

Table 6. Color of some dyes with different polymer and activators.

10	Dye	Polymer	EC001270	PVOH	EC001270	PVOH
		Activator	TEAB	TEAB	KI	KI
	Brilliant yellow		Light red	Yellow	Light orange	Red
	m-Cresol purple		Blue	Light orange	Orange	Blue
	Cresol Red		Light blue	Yellow	Blue	Blue
15	Phenol Red		Blue	Yellow	Yellow	Purple

Effect of nature of polymer: The other polymers were much slower, e.g., took more than ten hours compared to less than hour for EC.

20

Example 7. Effect of a barrier coat.

A coating of EC001270, phenol red and TEAB bromide of example 1
 25 was top-coated with EC001270 using number 3, 5, and 10 wire wound rods. After drying, the coatings were exposed to hydrogen peroxide vapor. The time required for the color change is shown in the table 7.

Table 7. Effect of thickness of a barrier coat on the time required for the color change.

30

35	Top-coating	Time (hours) required
	Bar	for the color change
	None	0.1
	3	3
	5	7
	10	18

5

Example 8. Two layer device, both containing indicators.

coating of EC001270, phenol red and TEAB was top-coated with that of EC001270, pararosaniline acetate and TEAB. This double-coated device appeared red. The device was exposed to hydrogen peroxide vapor. Pararosaniline of the top-coat changed from red-to-colorless. Phenol red of the undercoat then changed from yellow-to-blue. The color changes of the device with time are shown in Table 8.

Table 8. Color changes of the two-layer device having phenol red in the undercoat and pararosaniline in the top-coat.

Time (hours)	0	3	6	10	24
Color	Red	Light red	Purple	Blue	Dark blue

Example 9. Two-layer device, one containing indicator.

25

The two layer device was prepared by first coating a red pigmented ink followed by a top-coating of EC001270, malachite green oxalate and TEAB. The resultant device appeared very dark, almost black. The device was exposed to hydrogen peroxide. The device changed from black-to-red in about six hours. The color change is due to fading of the green color of malachite green oxalate which make the red color of the under coat visible.

Example 10. Moving boundary device.

35

A moving boundary device was created by applying a wedge shaped coating with a wedge shaped coating bar (0 at one end and #10 at the other

5 end) of EC001270 on the coating of EC001270, phenol red and TEAB. The device thus created was exposed to hydrogen peroxide vapor. A boundary was created between the original yellow color and the new blue color after about 2 hours. The boundary moved from the thin end towards the thick end. The distance traveled by the boundary is shown in Table 9.

10

Table 9. Distance traveled by the moving boundary device

	Time (hours)	2	4	10	24
15	Distance (cm)	0.2	0.5	2	3

Example 11. Detection of residual absorbed hydrogen peroxide.

20 A piece of 100-micron polyester film having a coating of EC001270 was exposed to hydrogen peroxide vapor for two hours. The coated film was removed and hung in air for ten minutes. A coating of polyvinyl alcohol, m-cresol red, and KI coated on polyester film was placed on hydrogen peroxide exposed film. The yellow coating turned light blue within 15 minutes.

25 In accordance with the above procedure, the device may be used for the detection of ozone and other oxidative vapors.

5 **Example 12. Pilot coating.**

 In 1200g EC001270 extender the following were added while stirring:
18g of 28% ammonium hydroxide, 100g of water, 200ml of isopropanol, 36g
pararosaniline acetate, 18g of phenol red and 64g of TEAB. The formulations
10 were coated on Tyvek^R and polyester film using a pilot coater of Rexam
Medical Packaging, Mt. Holly, NJ. Eleven other formulations with different
ratios of the dyes, TEAB and crosslinking agent (a polyaziridine) were also
coated. The coatings were red (burgundy) color.

15 The samples were treated with half, one and two cycles of plasma
sterilization cycles of hydrogen peroxide plasma using STERRAD[®] model
100, sterilization system of Advanced Sterilization Products. The samples
treated with half cycle were yellow-green while those treated with one and
two cycles were blue.

20 The coated samples were exposed to 100% ethylene oxide and steam
sterilization cycle. We found that there was no or negligible effect of (1) 100%
ETO for 16 hours and (2) normal steam sterilization treatment (e.g., 20
minutes at 121°C). Steam makes the color a bit lighter and ETO makes
25 slightly purple/violet.

 The samples were annealed at 60°C for five days and exposed to
100% humidity at 60°C for 5 days and then treated with the plasma along with
control (un-treated samples) for determination of the shelf life and color
30 stability. We found that there was no or negligible effect of: (1) dry heat at
60°C five days and (2) 100% humidity at 60°C for five days.

 Samples treated with half, one and two cycles of the plasma were
annealed at 60°C for five days and exposed to 100% humidity at 60°C for 5
35 days for determination archival life and color stability. There was no or
negligible effect of (1) dry heat at 60 C five days, (2) 100% humidity at 60°C
for five days on the final blue color.

5

The effect of hydrogen peroxide vapor depends on the exposure time. There was essentially no color change for about 4 hours. After about 5 hours the samples started turning yellow. At about 8 hours it started turning green color and at about 16 hours, they turned blue.

10

Example 13: Alternate embodiment

A coating of EC001270, phenol red and TEAB was top-coated with that of EC001270, pararosaniline acetate and TEAB. This double-coated
15 device appeared red. The device was exposed to hydrogen peroxide vapor and its plasma. First, pararosaniline in the top-coat changed from red-to-colorless. Phenol red in the undercoat then changed from yellow-to-blue.

20

Example 14: Alternate embodiment

An alternate embodiment of this type of device was prepared by first coating a red pigmented ink followed by a top-coating of EC001270, malachite green oxalate and TEAB. The resultant device appeared very dark,
25 almost black. The device changed from black-to-red when exposed to hydrogen peroxide.

To get orange-to-yellow and red/burgundy-to-yellow, methyl red was mixed with cresol red and acid fuschin with cresol red along with TEAB as
30 activator and EC001270 as a polymer. Red-to-blue color was obtained by mixing pararoseaniline acetate and phenol red as shown in example 12.

Example 15: Alternate embodiment

35 A mixture of pararoseaniline acetate and phenol red in the EC extender with tetraethylammonium bromide as an activator provides

- 5 burgundy-to-green-to-blue color changes when treated with hydrogen peroxide plasma.

To get orange-to-yellow and red/burgundy-to-yellow, methyl red was mixed with cresol red and acid fuchsin with cresol red along with TEAB as
10 activator and EC001270 as a polymer.

While this invention has been shown and described in detail in the context of a preferred embodiment, and with various modifications thereto, a
15 wide variety of other modifications can be made without departing from scope of the inventive teachings.

5

CLAIMS

I claim:

- 10 1. A device for monitoring an oxidizing vapor or plasma comprising:
at least one layer of polymer, having incorporated therein
- a) an indicator capable of undergoing at least one color change
- b) an activator for said indicator wherein said activator, when contacted
with said oxidizing vapor or plasma, undergoes a reaction wherein the
15 product of said reaction causes said indicator to undergo said color change.
2. The device of claim 1 wherein the said indicator comprises at least one
member of the group consisting of pigments, dyes, precursors of said dyes,
and mixtures of any of the foregoing group members.
- 20 3. The device of claim 1 wherein the said indicator is a pH-sensitive
sensitive dye.
4. The device of claim 1 wherein the said indicator is phenol red, m-
25 cresol purple, pararosaniline or mixtures thereof.
5. The device of claim 1 where the said indicator undergoes halogenation
or oxidation.
- 30 6. The device of claim 1 wherein the said indicator undergoes a yellow-
to-blue, red-to-yellow or red-to-blue color change.
7. The device of claim 1 wherein said polymer is soluble in an organic
solvent.

35

5 8. The device of claim 1 wherein said polymer is soluble in water or is water dispersible.

9. The device of claim 8 wherein said polymer is a water soluble or water dispersable homopolymer, or a copolymer or a mixture thereof.

10

10. The device of Claim 1 wherein said polymer is a polymer of styrene, acrylate, acrylic acid, acrylamide, vinyl acetate, vinyl alcohol, vinyl chloride, styrene, polyurethanes, cellulose nitrate, carboxymethyl cellulose or a mixture thereof.

15

11. The device of claim 10 wherein said polymer is a homopolymer, or a copolymers or a mixture thereof.

20

12. The device of claim 8 wherein said polymer is a polymer of styrene, acrylate, acrylic acid, acrylamide, vinyl acetate, vinyl alcohol, vinyl chloride, styrene, polyurethanes, cellulose nitrate, carboxymethyl cellulose or a mixture thereof.

25

13. The device of claim 1 wherein the polymer is an acrylate polymer.

14. The device of claim 1 wherein the polymer is cellulose nitrate or carboxymethylcellulose

30

15. The device of claim 1 wherein the reaction product of said activator and said plasma is a halo-acid.

16. The device of claim 1 wherein the said activator is a salt.

17. The device of Claim 1 wherein said activator a halide.

35

18. The device of Claim 1 wherein said activator is a bromide.

5

19. The device of claim 1 wherein the said activator is a bromide of alkali metal or quaternary amine.

20. The device of claim 1 wherein said activator is tetrabutylammonium bromide or tetraethylammonium bromide or mixture thereof.

21. The device of claim 1 wherein said activator is a salt of an amine and an organic or inorganic acid acid

22. The device of claim 1 wherein said activator is a thiocyanate

23. The device of claim 1 wherein said activator is sodium thiocyanate

24. The device of claim 1 additionally comprising an additive to control the diffusion of plasma gases.

25. The device of claim 1 additionally comprising a crosslinking agent or a plasticizer to control the diffusion of plasma gases.

26. The device of claim 1 additionally comprising a zinc compound or a polyaziridine to control the diffusion of plasma gases.

27. The device of claim 1 comprising two layers.

28. The device of claim 1 additionally comprising a polymeric top layer.

29. The device of claim 1 additionally comprising a wedge shaped polymeric top layer.

30. The process of making a device of claim 1 which comprises dissolving or dispersing the components thereof in a solvent therefor, applying the thus

5 formed solution or dispersate to a substrate and permitting the solvent to evaporate.

31. The process of claim 30 wherein the substrate is a container for an item to be sterilized.

10

32. The process of claim 30 wherein the substrate is a plastic film, paper or metal.

15

33. The process of claim 30 wherein the substrate is polyester film or spun bonded polyolefins.

34. The process of claim 30 wherein the solution is an ink formulation.

20

35. The process of claim 30 wherein the solution is an aqueous ink formulation.

36. The process of claim 35 said ink formulation comprises an acrylate polymer.

25

37. A process of using a device of claim 1 for monitoring sterilization of materials comprising the steps of

- a) affixing the device to said materials or containers containing same
- b) carrying out the process of sterilization including the step of introducing
- 30 the plasma into a vessel containing said materials or containers therefore and
- c) observing the presence of a color change of said device.

35

38. The process of claim 37 wherein the plasma is derived from a member selected from the group consisting of hydrogen peroxide, perchloric acid and oxygen.

5 39. The process of claim 37 wherein the plasma is that derived from hydrogen peroxide

40. A process of using the device of claim 1 for monitoring an oxidizing vapor comprising the steps of

- 10 a) exposing the device to an oxidizing vapor,
 b) observing the presence of color change in the device.

41. The process of claim 40, wherein the oxidizing vapor is ozone or hydrogen peroxide.

AMENDED CLAIMS

[received by the International Bureau on 2 October 2000 (02.10.00);
original claims 1, 40 and 41 amended; remaining claims unchanged (2 pages)]

5

CLAIMS

I claim:

- 10 1. A device for monitoring an oxidizing vapor or plasma comprising:
at least one layer of polymer, having incorporated therein
- a) an indicator capable of undergoing at least one color change
 - b) an activator for said indicator wherein said activator, when contacted
- 15 reaction causes said indicator to undergo said color change.
2. The device of claim 1 wherein the said indicator comprises at least one
member of the group consisting of pigments, dyes, precursors of said dyes,
and mixtures of any of the foregoing group members.
- 20 3. The device of claim 1 wherein the said indicator is a pH-sensitive
sensitive dye.
4. The device of claim 1 wherein the said indicator is phenol red, m-
25 cresol purple, pararosaniline or mixtures thereof.
5. The device of claim 1 where the said indicator undergoes halogenation
or oxidation.
- 30 6. The device of claim 1 wherein the said indicator undergoes a yellow-
to-blue, red-to-yellow or red-to-blue color change.
7. The device of claim 1 wherein said polymer is soluble in an organic
solvent.

35

5 39. The process of claim 37 wherein the plasma is that derived from hydrogen peroxide

40. A process of using the device of claim 1 for monitoring an oxidizing vapor comprising the steps of

- 10 a) exposing the device to an oxidizing plasma,
b) observing the presence of color change in the device.

41. The process of claim 40, wherein the oxidizing plasma is ozone or hydrogen peroxide.

15

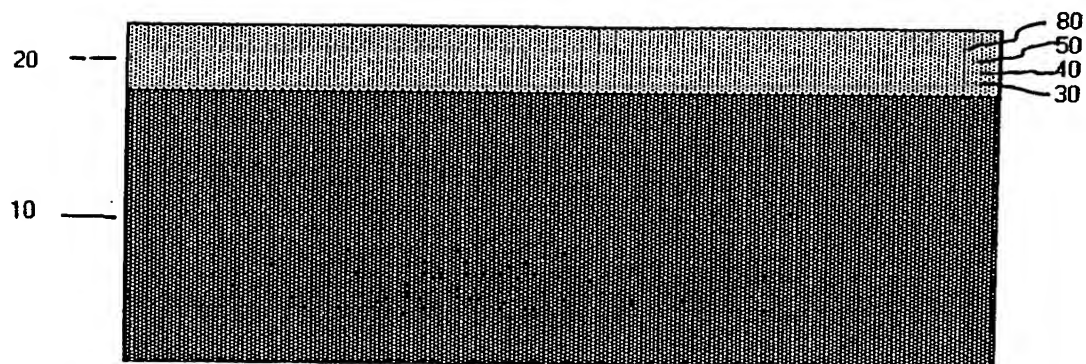


Figure 1

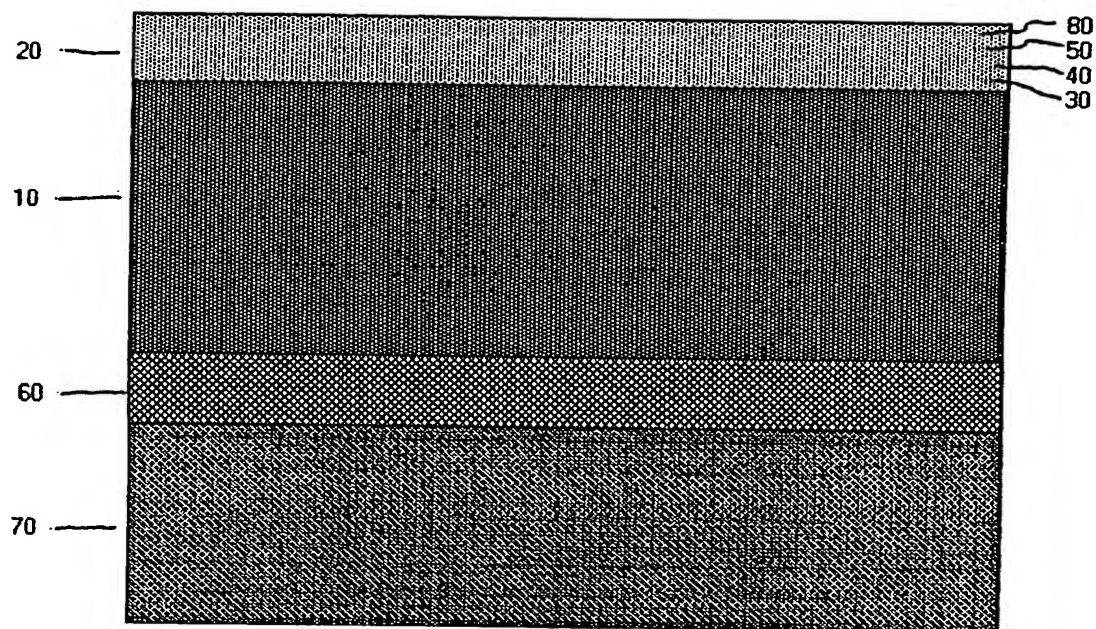


Figure 2

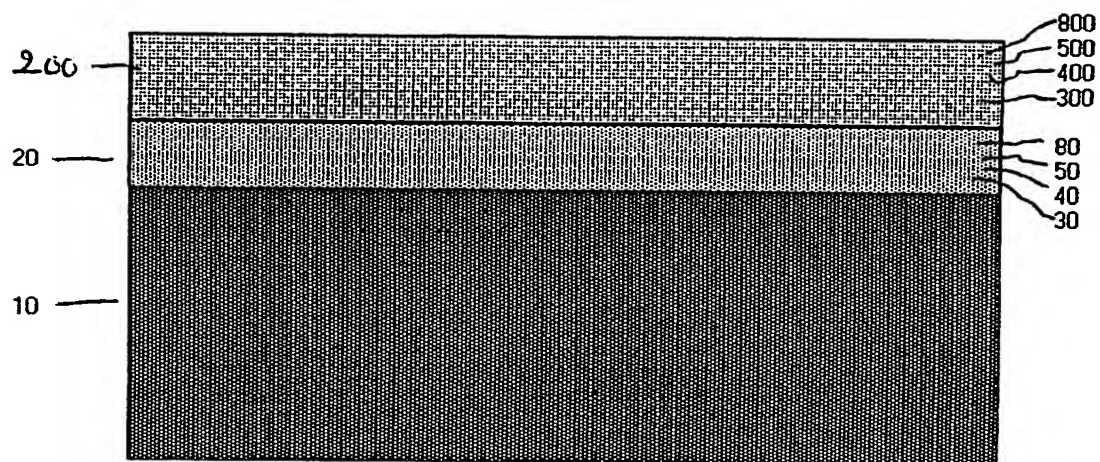


Figure 3

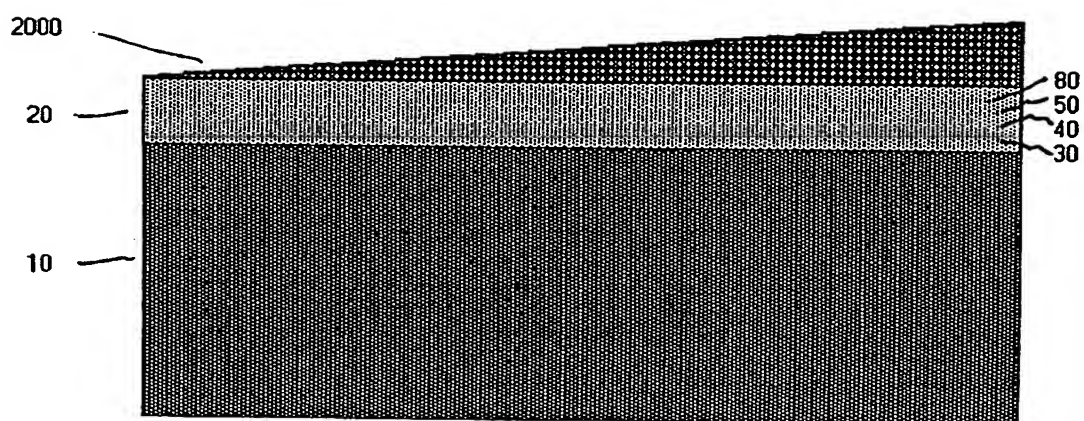


Figure 4

INTERNATIONAL SEARCH REPORT

Int. Application No

PCT/US 00/09493

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61L2/28 G01N31/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61L G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 58683 A (MINNESOTA MINING & MFG) 30 December 1998 (1998-12-30) page 4, line 3 -page 5, line 10	1-18, 27-41
A	WO 98 52621 A (MINNESOTA MINING & MFG) 26 November 1998 (1998-11-26)	
A	US 4 407 960 A (TRATNYEK JOSEPH P) 4 October 1983 (1983-10-04)	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

27 July 2000

Date of mailing of the international search report

04/08/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Heck, G

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 00/09493

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9858683 A	30-12-1998	AU 8174798 A EP 0991432 A	04-01-1999 12-04-2000
WO 9852621 A	26-11-1998	US 6063631 A AU 7581498 A EP 0984792 A	16-05-2000 11-12-1998 15-03-2000
US 4407960 A	04-10-1983	CA 1170551 A	10-07-1984